


Naaldhulslager BA912-Z-IKO - BA912-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba912-z-iko>

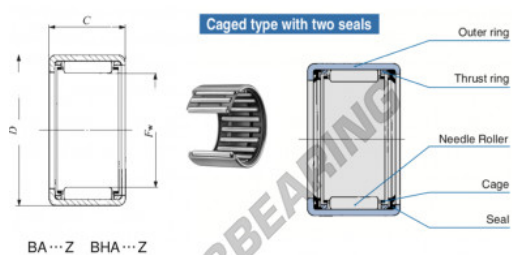

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
F_w	D	C	Shaft dia.		Housing bore dia.	C	C_0	rpm		
			Max.	Min.	Max.	Min.	N	N	RB 612	
14.288 (16)	19.05 (4.4)	19.05 (750)	1.5				8690	13000	30000	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060602930
Binnendiameter	14.288 mm
Binnendiameter	9/16" inch
Buitendiameter	19.05 mm
Buitendiameter	3/4" inch
Dikte	19.05 mm
Dikte	3/4" inch
Grenstoerental	30000 rpm
Dynamische belasting	8.69 kN
Statische belasting	13 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE