


Naaldhulslager BA105-Z-IKO - BA105-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba105-z-iko>

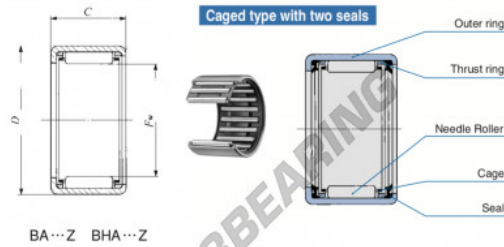

BA...Z BHA...Z

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable	Assembled
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>d</i>	<i>h_d</i>	<i>JT</i>		<i>C</i>	<i>C₀</i>	rotational speed(r/min)	inner ring	
			Max.	Min.	Max.	Min.	N	N	rpm		
15.875 (5/8)	20.638 (81/16)	7.92 (31/2)		1.3			2870	3220	25000	-	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060602947
Binnendiameter	15.875 mm
Buitendiameter	20.638 mm
Dikte	7.92 mm
Grenstoerental	25000 rpm
Dynamische belasting	2.87 kN
Statische belasting	3.22 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE