


## Naaldhulslager BA108-Z-IKO - BA108-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba108-z-iko>

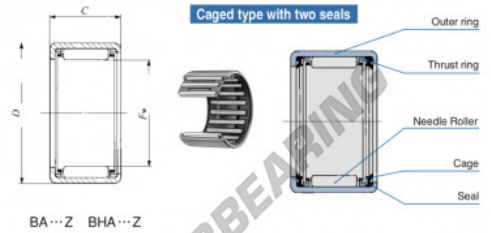

Boundary dimensions mm(inch)			Standard mounting dimensions mm			Basic dynamic	Basic static	Allowable	Assembled
$F_w$	$D$	$C$	$\frac{D}{2}$	$b$	$Z$	load rating	load rating	rotational	inner ring
			Min.	Min.	Max.	Min.	N	N	rpm
15.875 (7/8)	20.638 (19/16)	12.7 (1/2)	12.7 (1/2)	500	1.3		5420	7310	25000 (ISO 68-1)

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060602954
Binnendiameter	15.875 mm
Buitendiameter	20.638 mm
Dikte	12.7 mm
Grenstoerental	25000 rpm
Dynamische belasting	5.42 kN
Statische belasting	7.31 kN
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE