


Naaldhulslager BA1014-Z-IKO - BA1014-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba1014-z-iko>

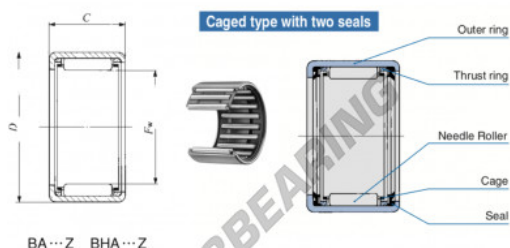

Boundary dimensions mm(inch)		Standard mounting dimensions mm		Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring
F_w	D	C	Shaft dia. d	Housing bore dia. H	C	C_0	
	Min.	Max.	Min.	Max.	Min.	Min.	rpm
15.875 (5/8)	20.638 (81/64)	22.221 (875/40)	15.875 (5/8)	15.854 (5/8)	20.650 (81/32)	10700	17500
							25000 (RB T14)

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060602985
Binnendiameter	15.875 mm
Buitendiameter	20.638 mm
Dikte	22.22 mm
Grenstoerental	25000 rpm
Gewicht	100 g
Dynamische belasting	10.7 kN
Statische belasting	17.5 kN
Verpakking	-
Standaard	Geen standaard

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE