


Naaldhulslager BA77-Z-IKO - BA77-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba77-z-iko>

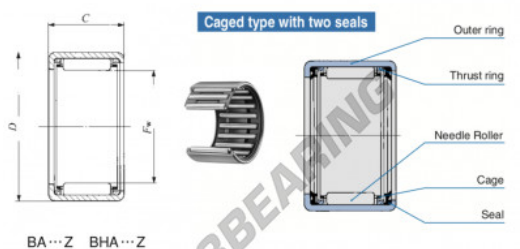

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
F_w	D	C	d	H		C	C_0	rpm		
			Shaft dia.	Min.	Max.	Housing bore dia.				
11.112 (0.438)	15.875 (0.625)	11.131 (0.438)		Min.	Max.	Min.	N	N	rpm	
							4150	4680	35000	

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060603012
Binnendiameter	11.112 mm
Buitendiameter	15.875 mm
Dikte	11.13 mm
Grenstoerental	35000 rpm
Dynamische belasting	4.15 kN
Statische belasting	4.68 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE