


Naaldhulslager BA88-Z-IKO - BA88-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba88-z-iko>

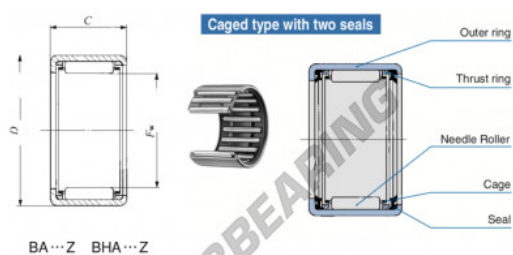

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring	
P_{in}	D	C	d_2	h_1	d_1	d_2	C	C_0	n		
			Max.	Max.	Min.	Max.	Min.	N	N	rpm	
12,700 (1/2)	17,462 (3/16)	12,750 (5/8)	1	12,700	12,689	17,472	17,454	4710	5700	30000	RB 58

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060603081
Binnendiameter	12.7 mm
Buitendiameter	17.462 mm
Dikte	12.7 mm
Grenstoerental	30000 rpm
Dynamische belasting	4.71 kN
Statische belasting	5.7 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE