


Naaldhulslager BA118-Z-IKO - BA118-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba118-z-iko>

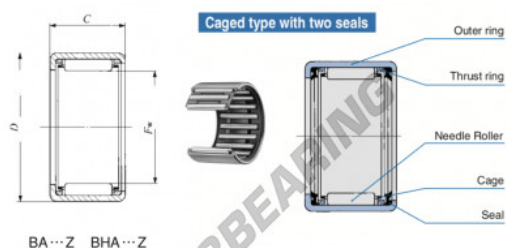

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring	
F_w	D	C	r_1	r_2	r_3	r_4	C	C_0	n	n_1	
	Max.	Max.	Min.	Max.	Min.	Max.	N	N	rpm	rpm	
17.462 (1116)	22.225 (1.4.8)	12.725 (500)	1.3	17.462	17.451	22.227	22.216	6140	6055	25000	RB 88

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060603128
Binnendiameter	17.462 mm
Buitendiameter	22.225 mm
Dikte	12.7 mm
Grenstoerental	25000 rpm
Dynamische belasting	6.14 kN
Statische belasting	88.5 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE