


Naaldhulslager BA1216-Z-IKO - BA1216-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba1216-z-iko>

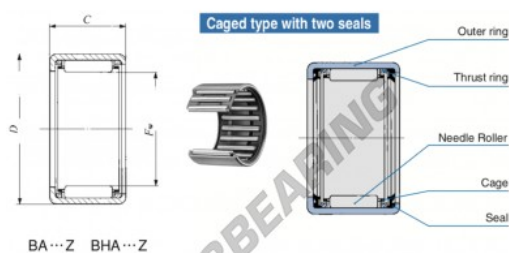

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring		
F_w	D	C	G	H	J	C	C_0	rpm			
19,950 (0.7854)	25,400 (1.0)	21,430 (848)	1,3	19,050 (0.75)	19,037 (0.75)	25,412 (1.0)	25,391 (1.0)	18300	26500	20500	IRB B16-1

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060603203
Binnendiameter	19.05 mm
Buitendiameter	25.4 mm
Dikte	25 mm
Grenstoerental	20000 rpm
Dynamische belasting	16 kN
Statische belasting	26 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE