


Naaldhulslager BA1310-Z-IKO - BA1310-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba1310-z-iko>

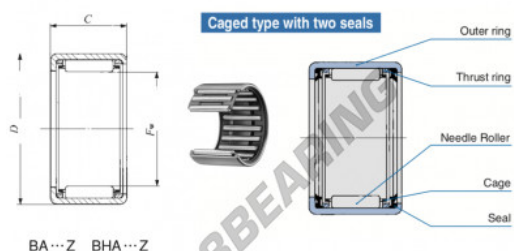

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable inner ring speed ⁽¹⁾	Assembled inner ring
<i>F_{or}</i>	<i>D</i>	<i>C</i>	<i>i2</i>	<i>h6</i>	Housing bore dia.	<i>C</i>	<i>C0</i>	rpm	
			Max.	Max.	Min.	Max.	Min.	N	N
25.638 (10.110)	26.988 (1.116)	15.881 (625)	1.3	20.630	20.625	27.000 (26.975)	9870	14200	19000 (98 910)

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060603234
Binnendiameter	20.638 mm
Binnendiameter	13/16" inch
Buitendiameter	26.988 mm
Buitendiameter	1 1/16" inch
Dikte	15.88 mm
Dikte	5/8" inch
Grenstoerental	19000 rpm
Dynamische belasting	9.87 kN
Statische belasting	14.2 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE