


Naaldhulslager BA1314-Z-IKO - BA1314-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba1314-z-iko>

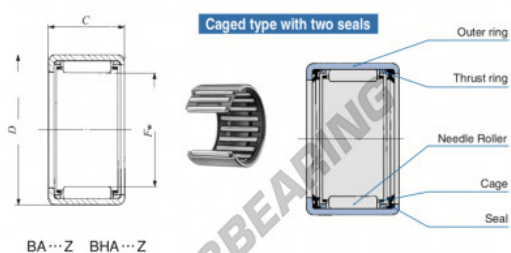

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
P_{10}	D	C	r_1	r_2	Housing bore dia. r_1	C	CV	rpm	RB 914
20.638 (0810)	26.988 (1.063)	22.22 (0.875)	1.3	20.638 (0.812)	27.500 (1.083)	14700	23850	19000	RB 914

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060603258
Binnendiameter	20.638 mm
Binnendiameter	13/16" inch
Buitendiameter	26.988 mm
Buitendiameter	1 1/16" inch
Dikte	22.22 mm
Dikte	0.875" inch
Grenstoerental	19000 rpm
Dynamische belasting	14.7 kN
Statische belasting	23.8 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE