


Naaldhulslager BA1320-Z-IKO - BA1320-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba1320-z-iko>

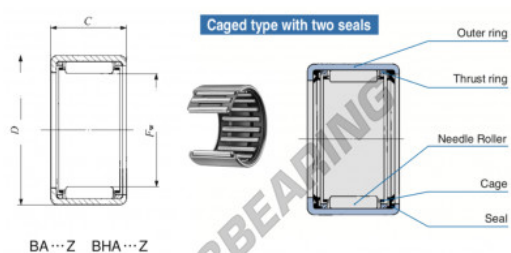

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
F_w	D	C	d	H	B	d_1	C	C_0		
			Max.	Max.	Min.	Max.	Min.	N	N	
20.638 (3/16)	26.988 (1.102)	31.751 (2.50)	1.5	20.638	20.625	27.050	29.978	21200	38100	19000

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060603272
Binnendiameter	20.638 mm
Buitendiameter	26.988 mm
Dikte	31.75 mm
Grenstoerental	19000 rpm
Dynamische belasting	21.2 kN
Statische belasting	38.1 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE