


Naaldhulslager BA1416-Z-IKO - BA1416-Z-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/ba1416-z-iko>

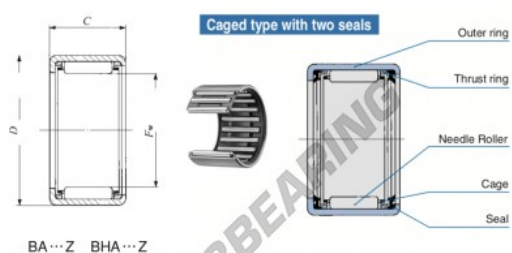

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring
F_w	D	C	d_2	d_1	d_3	d_4	C	CR	rpm	
22,025 (0.86)	28,575 (1.12)	25,40 (1.000)	Max. 22,225	Min. 22,212		Max. 28,587	Min. 28,566	17600	30500	18000 (RB 1018)

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060603326
Binnendiameter	22.225 mm
Buitendiameter	28.575 mm
Dikte	25.4 mm
Grenstoerental	18000 rpm
Dynamische belasting	17.6 kN
Statische belasting	30.5 kN
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE