


Naaldhulslager 14BKM2025JUJ-JTEKT - 14BKM2025JUJ-JTEKT

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/14bkm2025juj-jtekt>

Drawn cup needle roller bearings 

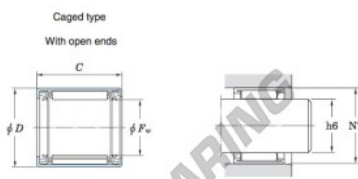

| Boundary dimensions (mm) | | | Basic load ratings (kN) | | Limiting speeds (min ⁻¹) | | Bearing No. ²⁾ | |
|--------------------------|-----|-----|-------------------------|-------|--------------------------------------|----------------------|---------------------------|-----------------|
| F_w | D | C | b min. | C_0 | C_{0r} | Oil lub. | Caged type | |
| | | | With open ends | | | | With open ends | With closed end |
| 14 | 20 | 25 | — | 12.2 | 15.5 | 14 000 ¹⁾ | 14BKM2025JUJ | |

| Full complement type | | Recommended dimensions (mm) | | | | Refer. Mass (g) | |
|----------------------|-----------------|-----------------------------|--------|------------------------|--------|-----------------|-----------------|
| With open ends | With closed end | Shaft dia. (H6) | | Housing bore dia. (H7) | | With open ends | With closed end |
| | | min. | max. | min. | max. | | |
| — | — | 13.989 | 14.000 | 19.972 | 19.993 | 20 | — |

PRODUCTKENMERKEN

| | |
|----------------|---------------|
| Merk | JTEKT |
| N° Ean13 | 3663952470009 |
| Binnendiameter | 14 mm |
| Buitendiameter | 20 mm |
| Dikte | 25 mm |
| Gewicht | 20 g |
| Verpakking | 1 |

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE