


## Naaldhulslager BKM172518UH-JTEKT - BKM172518UH-JTEKT

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/bkm172518uh-jtekt>

Drawn cup needle roller bearings 

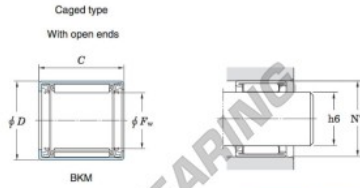

Boundary dimensions (mm)			Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )		Bearing No. <sup>2)</sup>	
$F_w$	$D$	$C$	$b$ min.	$C_0$	$C_{0r}$	Oil lub.	Caged type	
							With open ends	With closed end
17	25	18	—	10.9	13.1	11 000 <sup>1)</sup>	BKM172518UH	

Full complement type		Recommended dimensions (mm)				Refer. Mass (g)	
With open ends	With closed end	Shaft dia. (φ6) min.	max.	Housing bore dia. (N7) min.	max.	With open ends	With closed end
—	—	16.989	17.000	24.991 <sup>4)</sup>	25.012 <sup>4)</sup>	24	—

### PRODUCTKENMERKEN

Merk	JTEKT
N° Ean13	3663952470597
Binnendiameter	17 mm
Buitendiameter	25 mm
Dikte	18 mm
Gewicht	24 g
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE