


## Naaldhulslager NAXK25-JTEKT - NAXK25-JTEKT

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/naxk25-jtekt>

Boundary dimensions

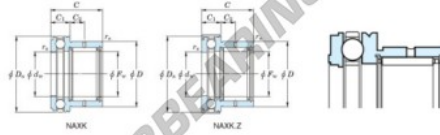

| Bearing No. | Boundary dimensions (mm) |    |    |                |                | Limiting speeds (min-1) | Basic load ratings (kN) |                       |                        |                        | Matching inner ring No. |
|-------------|--------------------------|----|----|----------------|----------------|-------------------------|-------------------------|-----------------------|------------------------|------------------------|-------------------------|
|             | Fw                       | D  | C  | d <sub>h</sub> | D <sub>h</sub> |                         | D <sub>h</sub> (lb)     | Radial C <sub>r</sub> | Radial C <sub>0r</sub> | Thrust C <sub>0a</sub> |                         |
| NAXK25      | 25                       | 37 | 30 | 25             | 42             | 6300                    | 18.8                    | 29.8                  | 18.8                   | 35.5                   | JR20x25x20              |

## PRODUCTKENMERKEN

|                      |               |
|----------------------|---------------|
| Merk                 | JTEKT         |
| N° Ean13             | 3616060625564 |
| Binnendiameter       | 25 mm         |
| Buitendiameter       | 42 mm         |
| Dikte                | 30 mm         |
| Grenstoerental       | 6300 rpm      |
| Dynamische belasting | 18.8 kN       |
| Statische belasting  | 29.8 kN       |
| Verpakking           | 1             |

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE