


## Naaldhulslager NK2620-JTEKT - NK2620-JTEKT

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/nk2620-jtekt>

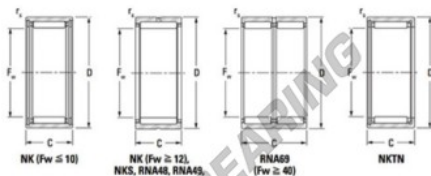

Metric series, caged, without inner ring

| Bearing No. | Boundary dimensions (mm) |    |    |                      | Basic load ratings (kN) |                 | Fatigue load limit (kN) | Limiting speeds (min <sup>-1</sup> ) |          |
|-------------|--------------------------|----|----|----------------------|-------------------------|-----------------|-------------------------|--------------------------------------|----------|
|             | Fw                       | D  | d  | r <sub>1</sub> (min) | C <sub>r</sub>          | C <sub>0r</sub> | C <sub>d</sub>          | Grease lub.                          | Oil lub. |
| NK26/20     | 26                       | 34 | 20 | 0.3                  | 19.7                    | 32              | 5.05                    | 11000                                | 17000    |

## PRODUCTKENMERKEN

|                      |               |
|----------------------|---------------|
| Merk                 | JTEKT         |
| N° Ean13             | 3616060631527 |
| Binnendiameter       | 26 mm         |
| Buitendiameter       | 34 mm         |
| Dikte                | 20 mm         |
| Grenstoerental       | 11000 rpm     |
| Dynamische belasting | 19.7 kN       |
| Statische belasting  | 32 kN         |
| Verpakking           | 1             |

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE