Naaldhulslager
BAM1320-IKO - BAM1320-IKO

https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/bam1320-iko

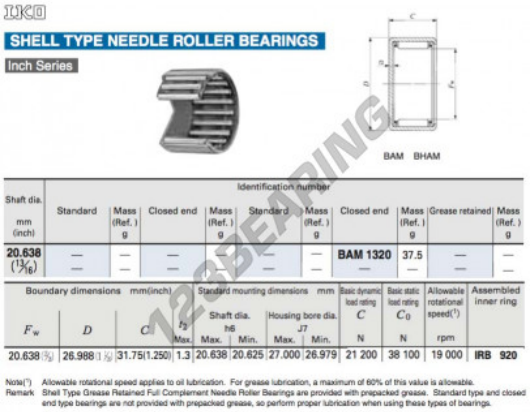

IKO

SHELL TYPE NEEDLE ROLLER BEARINGS

Inch Series

BAM BHAM

Shaft dia. mm (inch)	Identification number										
	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Grease retained	Mass (Ref.) g
20.638 (13/16)	—	—	—	—	—	—	BAM 1320	37.5	—	—

Boundary dimensions mm(inch)				Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring
				Shaft dia. h6		Housing bore dia. J7					
F_w	D	C	r_s Max.	Max.	Min.	Max.	Min.	C N	C_0 N	rpm	
20.638 (13/16)	26.988 (1 1/16)	31.75(1.250)	1.3	20.638	20.625	27.000	26.979	21 200	38 100	19 000	IRB 920

Note(1) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.
Remark Shell Type Grease Retained Full Complement Needle Roller Bearings are provided with prepacked grease. Standard type and closed end type bearings are not provided with prepacked grease, so perform proper lubrication when using these types of bearings.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952173108
Binnendiameter	20.64 mm
Buitendiameter	26.99 mm
Dikte	31.75 mm
Verpakking	1

contact@123kogellager.nl
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE