


Naaldhulslager GBRI487232-UU-IKO - GBRI487232-UU-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/gbri487232-uu-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

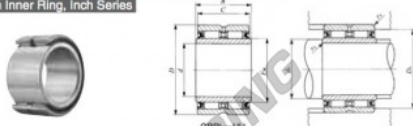

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
76.200 (3)	GBRI 487232 UU		1 880	76.200 (3)	114.300 (4 1/2)	50.800 (2)			
B	F _w	Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		Min.	Max.	D _s Max.					r _{as max} ⁽¹⁾
51.050	88.900 (3 1/2)	83.5	86	106.3	1.5	170 000	347 000	900	LRBZ 485632

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to grease lubrication.
Remark: This outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952383606
Binnendiameter	76.2 mm
Binnendiameter	3" inch
Buitendiameter	114.3 mm
Buitendiameter	4 1/2" inch
Dikte	50.8 mm
Dikte	2" inch
Verpakking	1
Standaard	Geen standaard

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE