


Kegelager

HM231140-HM231115-TIMKEN - HM231140-HM231115-TIMKEN

<https://www.123kogellager.nl/kogellager-behuizing/rollager/kegellager/hm231140-hm231115-timken>

TAPERED ROLLER BEARINGS
SINGLE-ROW • TYPE TS

TYPE TS

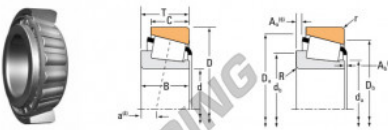

| Bearing Dimensions | | | Load Ratings | | | | | | Part Number | |
|--------------------|---------|---------|---------------------------------------|-------------------------|---------------------------------------|--------------------------------------|-----------------------|----------|-------------|--|
| Bore d | O.D. D | Width B | Dynamic ⁽¹⁾ C ₁ | Factor ⁽²⁾ e | Dynamic ⁽¹⁾ C ₂ | Factor ⁽²⁾ e ₂ | Static C ₃ | Inner | Outer | |
| mm | mm | mm | N | | N | | N | | | |
| 146.050 | 241.300 | 57.150 | 50700 | 3.32 | 105000 | 3.45 | 93200 | HM231140 | HM231115 | |
| 5.7500 | 9.5000 | 2.2500 | 134000 | | 34800 | | 210000 | | | |

| Bearing Dimensions | | | | | | | | | | Geometry Factors | | | Bearing Weight |
|--------------------|---------|--------------------------|---|--------------------------------------|--|--------------------------------------|-------------------------------|-------------------------------|----------------|------------------|----------------|-------|----------------|
| Shaft | | Housing | | Cage | | | | | G ₁ | G ₂ | C ₃ | | |
| Width B | Width C | ER. Dr. a ⁽¹⁾ | Max Shaft Fillet Radius R _{f1} | Backing Shoulder Dia. d _s | Max Housing Fillet Radius r ⁽¹⁾ | Backing Shoulder Dia. D _s | A ₁ ⁽¹⁾ | A ₂ ⁽¹⁾ | | | | | |
| 56.62 | 66.60 | -11.4 | 3.5 | 160.0 | 3.3 | 224.0 | 4.2 | 3.3 | 0.528 | 0.5 | 0.1027 | 8.92 | |
| 2.2300 | 1.7500 | -0.45 | 0.14 | 6.30 | 0.13 | 9.82 | 0.16 | 0.15 | | | | 21.85 | |

PRODUCTKENMERKEN

| | |
|----------------|---------------|
| Merk | TIMKEN |
| N° Ean13 | 3663952325798 |
| Binnendiameter | 146.05 mm |
| Buitendiameter | 241.3 mm |
| Dikte | 57.15 mm |
| Verpakking | 1 |

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE