


Naaldhulslager GBRI527632-U-IKO - GBRI527632-U-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/gbri527632-u-iko>

IKO
MACHINED TYPE NEEDLE ROLLER BEARINGS
With Seal, With Inner Ring, Inch Series

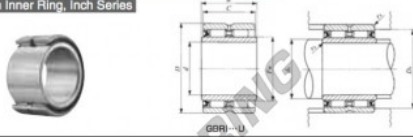

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		<i>d</i>	<i>D</i>	<i>C</i>			
82.550 (3 1/4)	GBRI 527632 U		2 010	82.550 (3 1/4)	120.650 (4 7/8)	50.800 (2)			
<i>B</i>	<i>F_w</i>	Standard mounting dimensions mm			Basic dynamic load rating <i>C</i> N	Basic static load rating <i>C₀</i> N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		Min.	Max.	<i>D_s</i> Max.					<i>r_{as max}</i> ⁽¹⁾
51.050	95.250 (3 3/4)	91	93	112.6	1.5	175 000	371 000	850	LRBZ 526032

Notes: (1) Minimum allowable value of chamfer dimension *r*
(2) Allowable rotational speed applies to grease lubrication.
Remark: This outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952383620
Binnendiameter	82.55 mm
Buitendiameter	120.65 mm
Dikte	50.8 mm
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE