


Naaldhulslager NAF152813-IKO - NAF152813-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/naf152813-iko>

IKO
NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE
With Inner Ring

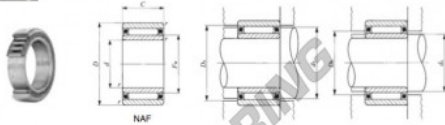

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm					Standard mounting dimensions mm				
			d	D	C	r _s min ⁽¹⁾	F _w	d _b Max.	D _s Min.	d _a Max.	D _b Max.	
15	NAF 152813	38.5	15	28	13	0.3	20	23.6	28	17	19	20.6
Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾	Assembled outer ring									
N	N	rpm	LRT 152013									
9 590	13 500	25 000										

Notes: (1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to grease lubrication.
Remarks: The outer ring has an oil groove and an oil hole.
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952384436
Binnendiameter	15 mm
Buitendiameter	28 mm
Dikte	13 mm
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE