


Nokrollen CFE24-VBR-IKO - CFE24-VBR-IKO

<https://www.123kogellager.nl/kogellager-behuizing/kogellager/nokrollen/cfe24-vbr-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Hexagon Hole

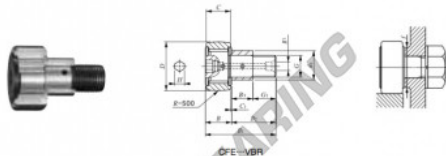

Outside diameter of eccentric collar mm	Identification number						Mass (Ref.)			
	Shield type			Sealed type			Ø	D	C	d _e
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring						
33	CFE 24	VBR					900	62	29	33

Boundary dimensions mm										
G	B ₃	B _{max}	B _{1max}	B ₂	C ₁	G ₁	H	H _{max}	f	C
M24×1.5	25.5	30.6	80.1	49.5	0.8	8	24	12	1	0.8

Mounting dimension	Maximum splining torque	Basic dynamic load rating	Basic static load rating	Maximum allowable static load
f	N·m	C	C ₀	N
40	215	46 600	92 000	52 000

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060460684
Binnendiameter	33 mm
Buitendiameter	62 mm
Dikte	29 mm
Gewicht	900 g
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE