


Nokrollen CFE18-VUUR-IKO - CFE18-VUUR-IKO

<https://www.123kogellager.nl/kogellager-behuizing/kogellager/nokrollen/cfe18-vuur-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

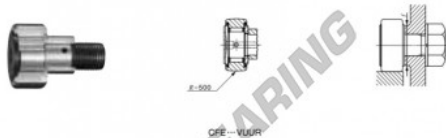

Outside diameter of eccentric outer ring mm	Identification number				Mass (Ref.)			
	Shield type		Sealed type		g	D	C	d _e
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
24			CFE 18	VUUR	285	40	20	24

Boundary dimensions mm										
G	B ₃	B _{max}	B ₁ _{max}	B ₂	C ₁	g ₁	G ₁	r ₁ _{min}	Excentricity E	Mounting diameter f Min.
M18 X 1.5	17.5	21.6	58.1	36.5	0.8	6	19	1	0.8	29

Maximum operating torque	Basic dynamic load rating C	Basic static load rating C ₀	Maximum allowable static load
N·m	N	N	N
86.2	25 300	51 300	31 100

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060461155
Binnendiameter	24 mm
Buitendiameter	40 mm
Dikte	20 mm
Gewicht	285 g
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE