


## Nokrollen CR22-VR-IKO - CR22-VR-IKO

<https://www.123kogellager.nl/kogellager-behuizing/kogellager/nokrollen/cr22-vr-iko>

IKO

### CAM FOLLOWERS

Inch Series Cam Followers Full Complement Type/With Screwdriver Slot

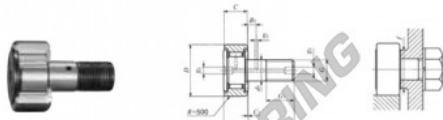

Stud dia. mm (inchi)	Identification number				Mass (Ref.)					
	Shield type With cover With cylindrical outer ring		Sealed type With shield With cylindrical outer ring		$\phi$	$D$	$C$	$d_1$	$G$ UNF	$G_1$
12.700 ( $\frac{1}{2}$ )	CR	22	VR		160	34.925 ( $\frac{1}{2}$ )	19.050 ( $\frac{3}{4}$ )	12.700 ( $\frac{1}{2}$ )	15.875 ( $\frac{5}{8}$ )	
Boundary dimensions mm(inch)					Mounting dimension $f$ Min. mm(inch)	Maximum tightening torque N·m	Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N		
$B_{max}$	$B_2$	$B_3$	$C_1$	$g_1$	$g_2$	$r$				
28.4 (1.118)	21.750 ( $\frac{7}{8}$ )	7.938 ( $\frac{5}{16}$ )	0.794 ( $\frac{1}{16}$ )	4.762 ( $\frac{3}{16}$ )	3.175 ( $\frac{1}{8}$ )	1.588 ( $\frac{1}{16}$ )	21.628 ( $\frac{7}{8}$ )	27.7	22 800	31 700

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060463784
Binnendiameter	12.7 mm
Buitendiameter	34.925 mm
Dikte	19.05 mm
Gewicht	160 g
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE