


# Nokrollen CR26-VBUUR-IKO - CR26-VBUUR-IKO

<https://www.123kogellager.nl/kogellager-behuizing/kogellager/nokrollen/cr26-vbuur-iko>



## CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

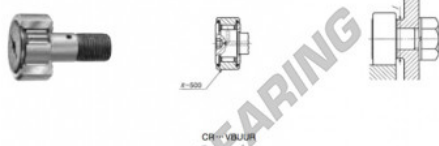

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d <sub>1</sub>	G UNF	G <sub>1</sub>		
	Shield type With cover outer ring	Shield type With cylindrical outer ring	Spoke type With cylindrical outer ring	Spoke type With cylindrical outer ring								
15.875 ( $\frac{5}{8}$ )			CR 26	VBUUR	265	41.275 ( $\frac{1}{2}$ )	22.225 ( $\frac{7}{8}$ )	15.875 ( $\frac{5}{8}$ )	$\frac{1}{4}$ -18	19.050 ( $\frac{3}{4}$ )		
Boundary dimensions mm(inch)												
B max	B <sub>2</sub>	B <sub>3</sub>	C <sub>1</sub>	g <sub>1</sub>	g <sub>2</sub>	H	r	f Min. mm(inch)	Mounting dimension N-mm	Maximum tightening torque N	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N
23.8 (0.93)	38.100 ( $\frac{1}{2}$ )	9.525 ( $\frac{3}{8}$ )	0.794 ( $\frac{1}{16}$ )	4.762 ( $\frac{3}{16}$ )	3.969 ( $\frac{5}{32}$ )	7.938 ( $\frac{1}{2}$ )	1.588 ( $\frac{1}{16}$ )	26.195 ( $\frac{1}{2}$ )	55.7	29 200	40 100	

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060464002
Binnendiameter	15.875 mm
Buitendiameter	41.275 mm
Dikte	22.225 mm
Gewicht	265 g
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE