


## Naalddaatslager AZ456514-IKO - AZ456514-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naalddaatslager/az456514-iko>

**IKO**  
**THRUST BEARINGS**  
Thrust Roller Bearings

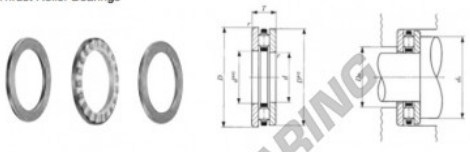

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
45	<b>AZ 456514</b>	169	<b>AZK 45656</b>	62	<b>WS 4565</b>	<b>GS 4565</b>	53.5	

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C <sub>0</sub>	Allowable rotational speed <sup>(2)</sup>
d	D	T	d <sub>c</sub>	D <sub>c</sub>	D <sub>w</sub>	B	r <sub>s</sub> (1)	C <sub>1</sub>	C <sub>2</sub>	d <sub>4</sub> Min.	D <sub>4</sub> Max.	N	N	rpm
45	65	14	45.05	64.5	6	4	0.6	49	62	62	49	40 800	133 000	5 500

Notes: (1) Minimum allowable value of chamfer dimension r.  
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060465962
Binnendiameter	45 mm
Buitendiameter	65 mm
Dikte	14 mm
Gewicht	169 g
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE