


Naaldtaatslager AZ22029050-IKO - AZ22029050-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldtaatslager/az22029050-iko>

IKO

THRUST BEARINGS

Thrust Roller Bearings

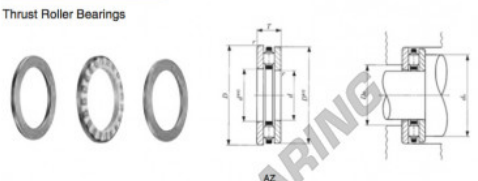

Shaft dia. mm	Identification number						
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
220	AZ 22029050	10 400	AZK 22029022	4 290	WS 220290	GS 220290	3 060

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ^(*)
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d ₄ Min.	D ₄ Max.	N	N	rpm
220	290	50	220.15	289	22	14	2	236	290	278	237	557 000	2 530 000	1 300

Notes: ^(*) Minimum allowable value of chamfer dimension r
⁽¹⁾ Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952487717
Binnendiameter	220 mm
Buitendiameter	290 mm
Dikte	50 mm
Gewicht	10400 g
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE