


## Naaldtaatslager AZK16020012-IKO - AZK16020012-IKO

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldtaatslager/azk16020012-iko>

**IKO**  
**THRUST BEARINGS**  
Thrust Roller Bearings

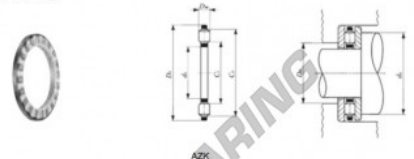

Shaft dia. mm	Identification number						
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
160	AZ 16020031	2 710	AZK 16020012	1 030	WS 160200	GS 160200	840

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C <sub>0</sub>	Allowable rotational speed <sup>(2)</sup>
d	D	T	d <sub>c</sub>	D <sub>c</sub>	D <sub>w</sub>	B	r <sub>s</sub> (1)	C <sub>1</sub>	C <sub>2</sub>	d <sub>4</sub> Min.	D <sub>4</sub> Max.	N	N	rpm
160	200	31	160.1	199.5	12	9.5	1	170	194	193	170	189 000	895 000	1 700

Notes: (1) Minimum allowable value of chamfer dimension r.  
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

## PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3616060466747
Binnendiameter	160 mm
Buitendiameter	200 mm
Dikte	12 mm
Gewicht	1030 g
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE