


SA Stangkop

GAR30-UK-2RS-DURBAL - GAR30-UK-2RS-DURBAL

<https://www.123kogellager.nl/kogellager-behuizing/stangkop/sa/gar30-uk-2rs-durbal>

GAR30-UK-2RS

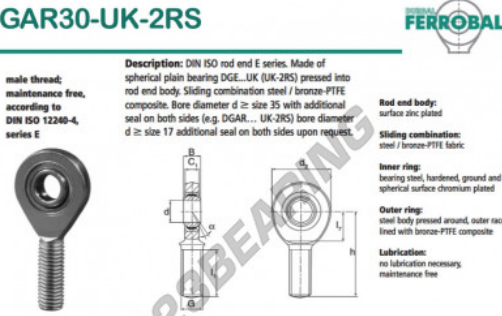

male thread:
maintenance free,
according to
DIN ISO 12240-4,
series E

Description: DIN ISO rod end E series. Made of spherical plain bearing DGE...UK (UK-2RS) pressed into rod end body. Sliding combination steel / bronze-PTFE composite. Bore diameter d ≥ size 35 with additional seal on both sides (e.g. DGEAR... UK-2RS) bore diameter d ≥ size 17 additional seal on both sides upon request.

Rod end body:
surface zinc plated

Sliding combination:
steel / bronze-PTFE fabric

Inner ring:
bearing steel, hardened, ground and spherical surface chromium plated

Outer ring:
steel body pressed around, outer race lined with bronze-PTFE composite

Lubrication:
no lubrication necessary,
maintenance free

order number	measurement (mm)					
right hand thread	left hand thread	d	G	S	C ₁	d ₂
GAR 30 UK (-2RS)		30	M 30 x 2	22	19,0	73

type	measurement (mm)			α [°]	load rating C ₀ [kN]	weight [kg]
	l, min	l ₁ min	h			
GAR / GAL 30 UK-2RS	65	37	110	6	110,0	0,890

PRODUCTKENMERKEN

Merk	DURBAL
N° Ean13	3663952493220
Binnendiameter	30 mm
Buitendiameter	73 mm
Dikte	22 mm
Type	-
Gewicht	897 g
Draad	-
Smering	-
Verpakking	-

contact@123kogellager.nl
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE