

## TAPR Stangkop GIHN-K-16LO-DURBAL - GIHN-K-16LO-DURBAL


<https://www.123kogellager.nl/kogellager-behuizing/stangkop/tapr/gihn-k-16lo-durbal>

### GIHN-K-16LO



**Description:** Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

\* without grease nipple

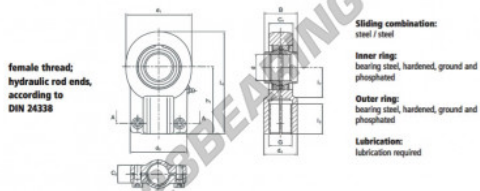

female thread;  
hydraulic rod ends,  
according to  
DIN 24338

**Sliding combination:**  
steel / steel  
**Inner ring:**  
bearing steel, hardened, ground and phosphated  
**Outer ring:**  
bearing steel, hardened, ground and phosphated  
**Lubrication:**  
lubrication required

order number	d	d <sub>1</sub>	measurement [mm]	G	d <sub>2</sub>	B	C <sub>1</sub>	C <sub>2</sub>
GIHN-K 16 LO	16	40	M 14 x 1,5	21,0	40	16	14	14

type	l <sub>1</sub> min	measurement [mm]	l <sub>2</sub>	l <sub>3</sub>	load rating	weight
GIHN-K / GIHN-KL 16 LO	19	44	64,0	18	36,5 (KN)	0,20 (kg)

## PRODUCTKENMERKEN

Merk	DURBAL
N° Ean13	3663952500072
Binnendiameter	16 mm
Binnendiameter	0.63" inch
Buitendiameter	40 mm
Buitendiameter	1.575" inch
Dikte	14 mm
Dikte	0.551" inch
Type	TAPR
Gewicht	200 g
Draad	Rechtse draad
Smering	met
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE