


# Naaldhulslager 12BKM1816UU-JTEKT - 12BKM1816UU-JTEKT

<https://www.123kogellager.nl/kogellager-behuizing/naaldlager/naaldhulslager/12bkm1816uu-jtekt>

Drawn cup needle roller bearings 

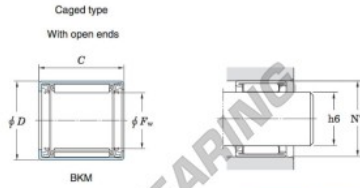

Boundary dimensions (mm)			Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )		Bearing No. <sup>2)</sup>	
$F_w$	$D$	$C$	$C_0$	$C_{10}$	Oil lub.		Caged type	
							With open ends	With closed end
12	18	16	—	5.95	6.25	16 000 <sup>1)</sup>	<b>12BKM1816UU</b>	

Full complement type		Recommended dimensions (mm)				(Refer.) Mass (g)	
With open ends	With closed end	Shaft dia. (φ6)		Housing bore dia. (N7)		With open ends	With closed end
		min.	max.	min.	max.		
—	—	11.989	12.000	17.977	17.995	11	—

## PRODUCTKENMERKEN

Merk	JTEKT
N° Ean13	3663952469737
Binnendiameter	12 mm
Buitendiameter	18 mm
Dikte	16 mm
Gewicht	11 g
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE