


Andere lagers GS150190-IKO - GS150190-IKO

<https://www.123kogellager.nl/kogellager-behuizing/andere-lagers/gs150190-iko>

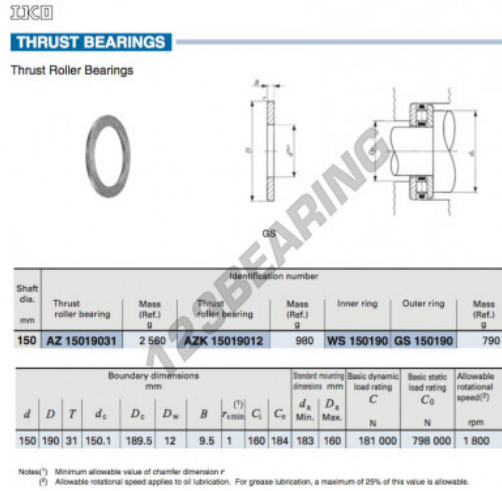

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
150	AZ 15019031	2 560	AZK 15019012	980	WS 150190	GS 150190	790	

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d ₄ Min.	D ₄ Max.	N	N	rpm
150	190	31	150.1	189.5	12	9.5	1	160	184	183	160	181 000	798 000	1 800

Notes: (1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCTKENMERKEN

Merk	IKO
N° Ean13	3663952224268
Binnendiameter	150 mm
Binnendiameter	5.906" inch
Buitendiameter	190 mm
Buitendiameter	7.48" inch
Dikte	9.5 mm
Dikte	0.374" inch
Gewicht	761 g
Verpakking	1

contact@123kogellager.nl

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE