


## Rollager NCF2920CV-SKF - NCF2920CV-SKF

<https://www.123kogellager.nl/kogellager-behuizing/rollager/roll/ncf2920cv-skf>

Dimensions d'encadrement			Charges de base		Vitesses de base		Désignation
d	D	B	C	C <sub>0</sub>	Vitesse de référence	Vitesse limite	
mm			kN		tr/min		
100	140	24	128	200	2200	2600	NCF 2920 CV

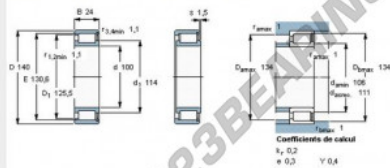

Technical drawings showing dimensions and coefficients for the NCF 2920 CV bearing. The drawings include a cross-section view with dimensions: D 140, E 130.8, D<sub>1</sub> 125.5, d 100, d<sub>1</sub> 114, B 24, f<sub>1</sub> 1.5, f<sub>2</sub> 1.5, r<sub>1</sub> 1.5, r<sub>2</sub> 1.5, and a detail view with dimensions: D<sub>max</sub> 134, D<sub>min</sub> 106, D<sub>max</sub> 134, D<sub>min</sub> 111, r<sub>max</sub> 1, r<sub>min</sub> 1. Coefficients of calculation: k<sub>1</sub> 0.2, k<sub>2</sub> 0.2, Y 0.4.

### PRODUCTKENMERKEN

Merk	SKF
N° Ean13	7316572305577
Binnendiameter	100 mm
Buitendiameter	140 mm
Dikte	24 mm
Verpakking	1

[contact@123kogellager.nl](mailto:contact@123kogellager.nl)

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE